

Multisec White

sizes:
39

colour RAL:
**WH RAL
9010**

material:
S

operating
up to:
8 BAR

guarantee:
5 YEARS

**electric
options
available**


The ever popular Multisec is available in a white powdercoated finish. A true classic.



Optional insertable feet



Electric only option

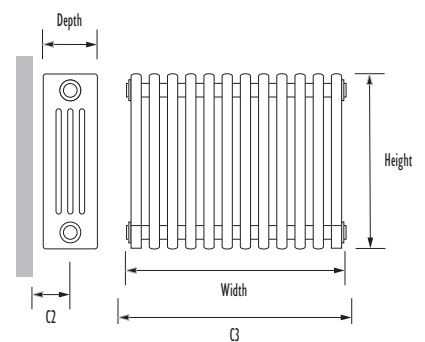

Multisec White

Code	Height	Width	Depth	Wall to face	Sections	Tapping Centres		Heat Output $\Delta t50^{\circ}\text{C}$		Heat Output $\Delta t60^{\circ}\text{C}$		Dry Weight kg	Water Content ltrs
						C2	C3	Watts	BTUs	Watts	BTUs		
2 COLUMN													
MSECW-500-2-B-12	492	540	66	98-108	12	65-75	560	446	1523	565	1929	9.9	5.9
MSECW-500-2-B-14	492	630	66	98-108	14	65-75	650	520	1775	659	2250	11.6	6.9
MSECW-500-2-B-16	492	720	66	98-108	16	65-75	740	595	2031	754	2574	13.3	7.8
MSECW-500-2-B-20	492	900	66	98-108	20	65-75	920	743	2537	942	3216	16.6	9.8
MSECW-500-2-B-24	492	1080	66	98-108	24	65-75	1100	892	3046	1130	3858	19.9	11.8
MSECW-600-2-B-10	592	450	66	98-108	10	65-75	470	437	1492	554	1891	9.6	5.7
MSECW-600-2-B-14	592	630	66	98-108	14	65-75	650	612	2089	776	2649	13.4	8
MSECW-600-2-B-18	592	810	66	98-108	18	65-75	830	787	2687	997	3404	17.3	10.3
MSECW-600-2-B-22	592	990	66	98-108	22	65-75	1020	962	3285	1219	4162	21.1	12.5
MSECW-600-2-B-25	592	1125	66	98-108	25	65-75	1145	1093	3732	1385	4729	24	14.2
MSECW-1800-2-B06	1792	270	66	98-108	6	65-75	290	747	2550	946	3230	15.06	9
MSECW-1800-2-B08	1792	360	66	98-108	8	65-75	380	995	3397	1261	4306	20.08	12
MSECW-1800-2-B10	1792	450	66	98-108	10	65-75	470	1244	4247	1576	5381	25.1	15.1
MSECW-1800-2-B12 L	1792	540	66	98-108	12	65-75	560	1493	5098	1891	6457	30.12	18.1
MSECW-1800-2-B15 L	1792	675	66	98-108	15	65-75	695	1866	6371	2364	8072	37.6	22.63
3 COLUMN													
MSECW-500-3-B-12	492	540	107	139-149	12	76-86	560	627	2141	794	2711	14.4	8.9
MSECW-500-3-B-14	492	630	107	139-149	14	76-86	650	732	2499	927	3165	16.8	10.4
MSECW-500-3-B-16	492	720	107	139-149	16	76-86	740	836	2854	1059	3616	19.2	11.8
MSECW-500-3-B-20	492	900	107	139-149	20	76-86	920	1045	3568	1324	4521	24	14.8
MSECW-500-3-B-24	492	1080	107	139-149	24	76-86	1100	1254	4282	1589	5425	28.8	17.8
MSECW-600-3-B-10	592	450	107	139-149	10	76-86	470	616	2103	780	2663	14.2	8.6
MSECW-600-3-B-14	592	630	107	139-149	14	76-86	650	862	2943	1092	3728	19.9	12
MSECW-600-3-B-18	592	810	107	139-149	18	76-86	830	1108	3783	1404	4794	25.6	15.5
MSECW-600-3-B-22 L	592	990	107	139-149	22	76-86	1020	1354	4623	1716	5859	31.2	18.9
MSECW-600-3-B-25 L	592	1125	107	139-149	25	76-86	1145	1539	5255	1950	6658	35.5	21.5
4 COLUMN													
MSECW-300-4-B-10	292	450	148	180-190	10	106-116	470	436	1489	552	1885	10.9	6.6
MSECW-300-4-B-12	292	540	148	180-190	12	106-116	560	523	1786	663	2264	13.08	7.9
MSECW-300-4-B-14	292	630	148	180-190	14	106-116	650	610	2083	773	2639	15.26	9.2
MSECW-300-4-B-24	292	1080	148	180-190	24	106-116	1100	1047	3575	1326	4527	26.16	15.8
MSECW-500-4-B-12	492	540	148	180-190	12	106-116	560	816	2786	1034	3530	19.8	11.7
MSECW-500-4-B-14	492	630	148	180-190	14	106-116	650	952	3250	1206	4118	23.1	13.7
MSECW-500-4-B-16	492	720	148	180-190	16	106-116	740	1088	3715	1378	4705	26.4	15.6
MSECW-500-4-B-20 L	492	900	148	180-190	20	106-116	920	1360	4644	1723	5883	33	19.6
MSECW-500-4-B-24 L	492	1080	148	180-190	24	106-116	1100	1632	5572	2068	7061	36.3	23.5
MSECW-600-4-B-10	592	450	148	180-190	10	106-116	470	803	2742	1017	3472	19.3	11.4
MSECW-600-4-B-14	592	630	148	180-190	14	106-116	650	1124	3838	1424	4862	27.02	15.9
MSECW-600-4-B-18 L	592	810	148	180-190	18	106-116	830	1445	4934	1831	6252	34.74	20.5
MSECW-600-4-B-22 L	592	990	148	180-190	22	106-116	1020	1766	6030	2238	7641	42.46	21.5
MSECW-600-4-B-25 L	592	1125	148	180-190	25	106-116	1145	2015	6880	2553	8717	48.3	24.4
Optional insertable feet- (pair) adds 120mm to height													
ZXSEC-09A	2 Column												
ZXSEC-09B	3 Column												
ZXSEC-09C	4 Column												

L = Allow up to 10 working days for delivery. All other items usually in stock, allow up to 3 working days for delivery.

For matching valves see pages 78-81

⚡ The following models are available as electric only options, 492mm x 4 column 12 & 16 sects, 592mm x 4 column 14 & 18 sections.

Electrical components carry a two year warranty.