

Hot Shelf

Installation Guide



Main Material of Manufacture - Stainless Steel

Attention The connection of this radiator to a central heating system should be carried out by a suitably competent person who is familiar with current regulations.

Read this guide before starting installation

Handling Advice

Please refer to the manual handling guidelines that are supplied with this product. This gives important information about the safe lifting of these radiators to minimise risk and damage.

Water Treatment

These products are for use on closed heating systems only; they are not suitable for installation on secondary HWS circuits.

On completion of the installation the entire system MUST be thoroughly cleaned and flushed to remove debris/flux residues etc. If a chemical cleanser is used, it must be thoroughly flushed from the system. Following this, the system MUST be dosed with a good quality water treatment to prevent corrosion. System design, flushing and dosing must be in accordance with BS 5449: 1990, BS EN 12828: 2003 and BS 7593: 1992

IMPORTANT: Failure to observe these requirements will render the guarantee on the product void.

Corrosion inhibitor must be used in accordance with the manufacturer's instructions and recommendations and should take into account the particular metals within the system.

Cleaning & Aftercare

The external surface of the radiator should be cleaned with mild detergent. No Solvents, Chlorides or Abrasives should be used.

Operating Pressure

Maximum 6 bar



Further Information

These radiators have been designed, manufactured and tested to ensure a long-lasting use. Should you require any further information, help or advice, or have any difficulties with these products or their installation and use, please contact our office on:


Tel: **01268 546700** Fax: **01268 888250**

Web: **www.mhsradiators.com**

write to: 3 Juniper West, Fenton Way, Southfields Business Park, Basildon, Essex SS15 6SJ



Installation Instructions

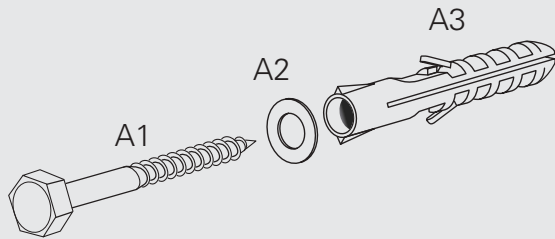

Installation Accessories:

A1) 4 Nr Hex head screws

A2) 4 Nr M8 Plain Washers

A3) 4 Nr 10mm Wall Plugs

Note:

The Hot Shelf towel warmer has concealed water connections and it is recommended that the flow and return pipes are buried in the wall or be routed through the wall from behind. Take care not to bury pipes in positions later drilled for wall fixings. The flow and return pipes should pass through the slotted openings along the underside rear part of the unit.

Wall Mounting

1: At the selected installation position, mark and drill the wall using a 10mm bit according to the fixing position detail given in the diagram below.

2: Insert the wall plugs provided.

3: Offer up the Hot Shelf and secure firmly to the wall using the hex head screws and washers provided.

(For plasterboard or other similar lightweight or hollow wall constructions - it is advisable to utilise alternative appropriate wall fixings such as toggles etc).

If necessary a degree of leveling adjustment may be effected (using the 4Nr socket head screws in place along the bottom rear edge of the unit) if the shelf has a tendency to tilt downwards at the front. This may require temporary slight loosening of the wall fixing screws.

4: Make final water connections to the unit via suitable radiator valves and fill vent and test the unit.

